

TCM

Innovative Machine
INOMA



Engine-Powered Forklift Trucks

2.0-3.5 ton

(Counter-Balanced Type)

SPECIFICATIONS

STANDARD SPECIFICATIONS

Characteristics	1 Manufacturer				Mitsubishi Logisnext				
	2 Model				FG20C3		FG20T3	FG25C3	FG25T3
	3 Load Capacity			kg	2000		2500		
	4 Load Center			mm	500		500		
	5 Power Type				Gasoline		Gasoline		
	6 Operator Position				Seated		Seated		
	7 Tire Type		Front / Rear		Pneumatic		Pneumatic		
	8 Wheels (x = driven)		Front / Rear		2X / 2		2X / 2		
Dimensions	9 Maximum Fork Height			mm	3000		3000		
	10 Free Lift			mm	110		110		
	13 Fork Size		L × W × T	mm	1070 × 122 × 40		1070 × 122 × 40		
	Fork Spread (Outside)		Max. / Min.	mm	1020 / 244		1020 / 244		
	14 Tilt Angle		Fwd. / Bwd.	deg	6 / 12		6 / 12		
	15 Length to Fork Face			mm	2485		2555		
	16 Overall Width			mm	1150		1150		
	17 Mast Height Fork Lowered			mm	2030		2030		
	18 Mast Height Fork Raised			mm	4030		4030		
	19 Overhead Guard Height(EXB,EXK)			mm	2070		2070		
	Overhead Guard Height(EXC,EXE,EXN)			mm	2130		2130		
	20 Operator's Seat Height			mm	1045		1045		
	21 Turning Radius (Outside)			mm	2170		2240		
	22 Load Distance (Centerline of front axle to front face of forks)			mm	450		450		
	Rear Overhang			mm	435		505		
23 Basic Right Angle Stacking Aisle Width			mm	3890		3960			
Performance	24		Travel, Max. (Fwd. / Rvs.)	Full Load	km/h	18.5		18.5	
				No Load	km/h	19		19	
			Lifting	Full Load	mm/sec	540		540	
				No Load	mm/sec	580		580	
	26		Lowering	Full Load	mm/sec	450		450	
				No Load	mm/sec	550		550	
	28 Max. Drawbar Pull			Full Load	kN	12.3	16.7	12.3	16.7
				No Load	kN	8.3		8.3	
30 Max. Gradeability*			Full Load	%	20	28	19	24	
			No Load	%	20		20		
Weight	32 Total Weight			kg	3220		3570		
	33 Weight Distribution		Full Load	Front	kg	4620		5350	
				Rear	kg	600		720	
			No Load	Front	kg	1400		1370	
Rear				kg	1780		2200		
Chassis & Wheels	35		Number	Front / Rear		2 / 2		2 / 2	
				Tires		7.00-12-12PR(I)		7.00-12-12PR(I)	
	37		Size	Front		6.00-9-10PR(I)		6.00-9-10PR(I)	
				Rear		6.00-9-10PR(I)		6.00-9-10PR(I)	
	38 Wheelbase			mm	1600		1600		
	39 Tread			Front	mm	970		970	
				Rear	mm	970		970	
	Backrest Height			mm	1000		1000		
	Overhead Guard Clearance			mm	1005		1005		
	Counterweight Height			mm	1110		1110		
	Drawbar Pin Center Height			mm	530		530		
	Step Height / Floor Height			mm	435 / 650		435 / 650		
40 Underclearance		Min. with Load		mm	110		110		
		Center of Wheelbase		mm	120		120		
42 Brake		Service (Foot)			Hydraulic-Foot pedal		Hydraulic-Foot pedal		
		Parking			Mechanical-Hand lever		Mechanical-Hand lever		
Engine & Transmission	45 Battery		Voltage / Capacity (5HR)		V/AH	12 / 30		12 / 30	
	49 Internal Combustion Engine		Make / Model			GCT / GK21		GCT / GK21	
			Rated Horsepower / r.p.m.		kW	34.6 / 2250		34.6 / 2250	
			Rated Torque / r.p.m.		N-m	153.5 / 1600		153.5 / 1600	
			Number of Cylinder			4		4	
			Piston Displacement		cc	2065		2065	
			Alternator output		kW/Amp	0.60 / 50		0.60 / 50	
			Fuel Tank Capacity Type		liter	70		70	
	55 Transmission		Type			Manual	Power-shift	Manual	Power-shift
Stage			Fwd.-Rvs.		2-2	1-1	2-2	1-1	
57 Operating Pressure		For Attachments		MPa (psi)	17.7		17.7		

NOTE : * Computed values.

Mitsubishi Logisnext																			
FG30C3		FG30T3		FHG20C3		FHG20T3		FHG25C3		FHG25T3		FHG30C3		FHG30T3		FG35T3S			
3000				2000				2500				3000				3500			
500				500				500				500				500			
Gasoline				Gasoline				Gasoline				Gasoline				Gasoline			
Seated				Seated				Seated				Seated				Seated			
pneumatic				pneumatic				pneumatic				pneumatic				Pneumatic			
2X / 2				2X / 2				2X / 2				2X / 2				2X / 2			
3000				3000				3000				3000				3000			
165				110				110				165				170			
1070 × 125 × 45				1070 × 122 × 40				1070 × 122 × 40				1070 × 125 × 45				1070 × 150 × 50			
1090 / 250				1020 / 244				1020 / 244				1090 / 250				1090 / 300			
6 / 12				6 / 12				6 / 12				6 / 12				6 / 12			
2705				2485				2555				2705				2800			
1225				1150				1150				1225				1290			
2075				2030				2030				2075				2135			
4260				4030				4030				4260				4255			
2090				2070				2070				2090				2140			
2150				2130				2130				2150				2200			
1070				1045				1045				1070				1120			
2400				2170				2240				2400				2470			
480				450				450				480				495			
525				435				505				525				605			
4150				3890				3960				4150				4265			
19				18.5				18.5				19				18.5			
19.5				19				19				19.5				19			
440				600				600				500				400			
490				620				620				520				450			
450				450				450				450				420			
				550				550								450			
10.8	14.2	14.2	22.1	14.2	22.1	12.7	19.6	17.0											
9.8		8.3		8.3		9.8		9.8											
14	18	24	36	21	33	18	24	17											
20		20		18		20		16											
4250		3230		3580		4260		4820											
6350		4630		5350		6350		7235											
900		600		730		910		1085											
1620		1450		1370		1620		1685											
2630		1780		2210		2640		3135											
2 / 2		2 / 2		2 / 2		2 / 2		2 / 2											
28X9-15-12PR(I)		7.00-12-12PR(I)		7.00-12-12PR(I)		28X9-15-12PR(I)		250-15-16PR(I)											
6.50-10-10PR(I)		6.00-9-10PR(I)		6.00-9-10PR(I)		6.50-10-10PR(I)		6.50-10-12PR(I)											
1700		1600		1600		1700		1700											
1000		970		970		1000		1060											
970		970		970		970		970											
1220		1000		1000		1220		1220											
1005		1005		1005		1005		1005											
1130		1110		1110		1130		1180											
560		530		530		560		610											
460 / 680		435 / 650		435 / 650		460 / 680		485 / 730											
140		110		110		140		125											
145		120		120		145		190											
Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal											
Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever											
12 / 30		12 / 30		12 / 30		12 / 30		12 / 30											
GCT / GK21		GCT / GK25		GCT / GK25		GCT / GK25		GCT / GK25											
34.6 / 2250		39.5 / 2100		39.5 / 2100		39.5 / 2100		39.5 / 2100											
153.5 / 1600		188.1 / 1600		188.1 / 1600		188.1 / 1600		188 / 1600											
4		4		4		4		4											
2065		2488		2488		2488		2488											
0.60 / 50		0.60 / 50		0.60 / 50		0.60 / 50		0.60 / 50											
70		70		70		70		70											
Manual	Power-shift	Manual	Power-shift	Manual	Power-shift	Manual	Power-shift	Power-shift											
2-2	1-1	2-2	1-1	2-2	1-1	2-2	1-1	1-1											
17.7		17.7		17.7		17.7		17.7											

STANDARD SPECIFICATIONS

Characteristics	1 Manufacturer				Mitsubishi Logisnext			
	2 Model				FD20C3Z	FD20T3Z		
	3 Load Capacity			kg	2000			
	4 Load Center			mm	500			
	5 Power Type				Diesel			
	6 Operator Position				Seated			
	7 Tire Type		Front / Rear		Pneumatic			
	8 Wheels (x = driven)		Front / Rear		2X / 2			
Dimensions	9 Maximum Fork Height			mm	3000			
	10 Free Lift			mm	110			
	13 Fork Size		L × W × T	mm	1070 × 122 × 40			
	Fork Spread (Outside)		Max. / Min.	mm	1020 / 245			
	14 Tilt Angle		Fwd. / Bwd.	deg	6 / 12			
	15 Length to Fork Face			mm	2485			
	16 Overall Width			mm	1150			
	17 Mast Height Fork Lowered			mm	2030			
	18 Mast Height Fork Raised			mm	4030			
	19 Overhead Guard Height(EXB,EXK)			mm	2070			
	Overhead Guard Height(EXC,EXE,EXN)			mm	2130			
	20 Operator's Seat Height			mm	1045			
	21 Turning Radius (Outside)			mm	2170			
	22 Load Distance (Centerline of front axle to front face of forks)			mm	450			
	Rear Overhang			mm	435			
23 Basic Right Angle Stacking Aisle Width			mm	3890				
Performance	24 Speeds		Travel, Max. (Fwd. / Rvs.)	Full Load	km/h	17.5	18	
				No Load	km/h	18	18.5	
			Lifting	Full Load	mm/sec	530		
				No Load	mm/sec	570		
			Lowering	Full Load	mm/sec	450		
				No Load	mm/sec	550		
	28 Max. Drawbar Pull			Full Load	kN	11.7	13.7	
			No Load	kN	8.3			
30 Max. Gradeability*			Full Load	%	21	25		
			No Load	%	20			
Weight	32 Total Weight			kg	3320			
	33 Weight Distribution		Full Load	Front	kg	4670		
				Rear	kg	650		
			No Load	Front	kg	1490		
Rear				kg	1830			
Chassis & Wheels	35 Tires		Number	Front / Rear		2 / 2		
				Size		7.00-12-12PR(I)		
					Rear		6.00-9-10PR(I)	
			38 Wheelbase			mm	1600	
	39 Tread			Front	mm	970		
				Rear	mm	970		
	Backrest Height			mm	1000			
	Overhead Guard Clearance			mm	1005			
Counterweight Height			mm	1110				
Drawbar Pin Center Height			mm	530				
Step Height / Floor Height			mm	435 / 650				
Engine & Transmission	40 Underclearance		Min. with Load		mm	110		
			Center of Wheelbase		mm	120		
	42 Brake		Service (Foot)			Hydraulic-Foot pedal		
			Parking			Mechanical-Hand lever		
	45 Battery		Voltage / Capacity (5HR)		V/AH	12 / 55		
	49 Internal Combustion Engine		Make / Model			ISUZU / C240		
			Rated Horsepower / r.p.m.		kW	35.4 / 2500		
			Rated Torque / r.p.m.		N-m	140 / 1800		
			Number of Cylinder			4		
			Piston Displacement		cc	2369		
Alternator output			kW/Amp	0.54 / 45				
Fuel Tank Capacity Type			liter	70				
55 Transmission		Type			Manual	Power-shift		
		Stage	Fwd.-Rvs.		2-2	1-1		
57	Operating Pressure		For Attachments		MPa (psi)	17.7		

NOTE : * Computed values.

Mitsubishi Logisnext					
FD25C3Z	FD25T3Z	FD30C3Z	FD30T3Z	FD35T3S	
2500		3000		3500	
500		500		500	
Diesel		Diesel		Diesel	
Seated		Seated		Seated	
Pneumatic		Pneumatic		Pneumatic	
2X / 2		2X / 2		2X / 2	
3000		3000		3000	
110		165		170	
1070 × 122 × 40		1070 × 125 × 45		1070 × 150 × 50	
1020 / 245		1090 / 250		1090 / 300	
6 / 12		6 / 12		6 / 12	
2555		2705		2800	
1150		1225		1290	
2030		2075		2135	
4030		4260		4255	
2070		2090		2140	
2130		2150		2200	
1045		1070		1120	
2240		2400		2470	
450		480		495	
505		525		605	
3960		4150		4235	
17.5	18	18.5		19	
18	18.5	19		19.5	
530		450		460	
570		460		490	
450		450		420	
550		450		450	
11.7	13.7	10.8	13.7	18.1	
8.3		9.8		10.8	
18	25	15	18	18	
18		20		17	
3680		4370		4940	
5400		6420		7290	
780		950		1150	
1420		1690		1740	
2260		2680		3200	
2 / 2		2 / 2		2 / 2	
7.00-12-12PR(I)		28×9-15-12PR(I)		250-15-16PR(I)	
6.00-9-10PR(I)		6.50-10-10PR(I)		6.50-10-12PR(I)	
1600		1700		1700	
970		1000		1060	
970		970		970	
1000		1220		1220	
1005		1005		1005	
1110		1130		1180	
530		560		610	
435 / 650		460 / 680		485 / 730	
110		140		125	
120		145		190	
Hydraulic-Foot pedal		Hydraulic-Foot pedal		Hydraulic-Foot pedal	
Mechanical-Hand lever		Mechanical-Hand lever		Mechanical-Hand lever	
12 / 55		12 / 55		12 / 64	
ISUZU / C240		ISUZU / C240		GCT / QD32	
35.4 / 2500		35.4 / 2500		44 / 2300	
140 / 1800		140 / 1800		189 / 1800	
4		4		4	
2369		2369		3153	
0.54 / 45		0.54 / 45		0.72 / 60	
70		70		70	
Manual	Power-shift	Manual	Power-shift	Power-shift	
2-2	1-1	2-2	1-1	1-1	
17.7		17.7		17.7	

Wide View Mast

Wide View Mast VM

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height		Tilting Angle F/B	(1) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	Raised with Backrest		FG20T3 FG20C3			FG25T3 FG25C3		
	FG20C3 / FD20C3Z		FG25C3 / FD25C3Z											
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)		mm	mm	mm	deg	S	DD	SDD	S	DD
VM250	2000	2000	2500	2500	2500	1780	3530	6-10	3170	3275	3290	3530	3635	3650
VM270	2000	2000	2500	2500	2700	1880	3730	6-10	3185	3290	3305	3545	3650	3665
VM300	2000	2000	2500	2500	3000	2030	4030	6-12	3210	3315	3330	3570	3675	3690
VM330	2000	2000	2500	2500	3300	2180	4330	6-12	3235	3340	3355	3595	3700	3715
VM350	2000	2000	2500	2500	3500	2280	4530	6-12	3250	3355	3370	3610	3715	3730
VM375	2000	2000	2500	2500	3750	2405	4780	6-6 *6-12	3270	3375	3390	3630	3735	3750
VM400	2000	2000 2000	2500	2500	4000	2580	5030	6-6 *6-12	3325	3430	3445	3685	3790	3805
VM425	1950 *2000	1950 *2000	2450 *2500	2450 *2500	4250	2705	5280	6-6 *6-12	3345	3450	3465	3705	3810	3825
VM450	1900 *1950	1900 *1950	2150 *2450	2350 *2450	4500	2830	5530	6-6 *6-12	3365	3470	3485	3725	3830	3845
VM475	1800 *1850	1800 *1850	1850 *2350	2200 *2350	4750	2955	5780	6-6 *6-6	3385	3490	3505	3745	3850	3865
VM500	1650 *1700	1700	1700 *2250	2000 *2250	5000	3080	6030	6-6 *6-6	3405	3510	3525	3765	3870	3885
VM550	*1500	*1500	*1700	*1700	5500	3380	6530	*3-6	—	3585	3600	—	3945	3960
VM600	*1300	*1300	*1400	*1400	6000	3630	7030	*3-6	—	3625	3640	—	3985	4000

NOTE :(1) Weight for diesel model:+110kg(C240)

Wide View Full Free 2-Stage Mast VFM

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest			FG20T3 FG20C3			FG25T3 FG25C3		
	FG20C3 / FD20C3Z		FG25C3 / FD25C3Z												
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)		mm	mm	mm	mm	deg	S	DD	SDD	S	DD
VFM250	2000	2000	2500	2500	2500	1780	3530	780	6-10	3225	3330	3345	3585	3690	3705
VFM270	2000	2000	2500	2500	2700	1880	3730	880	6-10	3245	3350	3365	3605	3710	3725
VFM300	2000	2000	2500	2500	3000	2030	4030	1030	6-12	3270	3375	3390	3630	3735	3750
VFM330	2000	2000	2500	2500	3300	2180	4330	1180	6-12	3295	3400	3415	3655	3760	3775
VFM350	2000	2000	2500	2500	3500	2280	4530	1280	6-12	3310	3415	3430	3670	3775	3790
VFM375	2000	2000	2500	2500	3750	2405	4780	1405	6-6 *6-12	3330	3435	3450	3690	3795	3810
VFM400	2000	2000	2500	2500	4000	2580	5030	1580	6-6 *6-12	3390	3495	3510	3750	3855	3870
VFM425	1950 *2000	1950 *2000	2450 *2500	2450 *2500	4250	2705	5280	1705	6-6 *6-12	3410	3515	3530	3770	3875	3890
VFM450	1900 *1950	1900 *1950	2150 *2450	2350 *2450	4500	2830	5530	1830	6-6 *6-12	3435	3540	3555	3795	3900	3915
VFM475	1800 *1850	1800 *1850	1850 *2350	2200 *2350	4750	2955	5780	1955	6-6 *6-6	3455	3560	3575	3815	3920	3935
VFM500	1650 *1700	1700	1700 *2250	2000 *2250	5000	3080	6030	2080	6-6 *6-6	3475	3580	3595	3835	3940	3955
VFM550	*1500	*1500	*1700	*1700	5500	3380	6530	2380	*3-6	—	3660	3675	—	4020	4035
VFM600	*1300	*1300	*1400	*1400	6000	3630	7030	2630	*3-6	—	3700	3715	—	4060	4075

NOTE :(1) For height without backrest: -385mm
(2) For free lift without backrest: +385mm
(3) Weight for without backrest: -20kg
Weight for diesel model: +110kg(C240)

Wide View Full Free 3-Stage Mast VFHM

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest			FG20T3 FG20C3			FG25T3 FG25C3		
	FG20C3 / FD20C3Z		FG25C3 / FD25C3Z												
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)						mm	mm	mm	mm	S	DD
VFHM360	2000	2000	2500	2500	3600	1780	4630	780	6-6 *6-10	3365	3470	3485	3725	3830	3845
VFHM400	2000	2000	2500	2500	4000	1905	5030	905	6-6 *6-10	3395	3500	3515	3755	3860	3875
VFHM435	1900 *2000	1900 *2000	2200 *2400	2300 *2400	4350	2030	5380	1030	6-6 *6-10	3425	3530	3545	3785	3890	3905
VFHM480	1700 *1900	1800 *1900	1900 *2300	2200 *2300	4800	2180	5830	1180	6-6 *6-10	3455	3560	3575	3815	3920	3935
VFHM500	1500 *1800	1750 *1800	1600 *2250	2000 *2250	5000	2280	6030	1280	6-6 *6-10	3480	3585	3600	3840	3945	3960
VFHM540	1200 *1750	1650 *1750	1300 *2150	1700 *2150	5400	2405	6430	1405	3-6 *3-6	3510	3615	3630	3870	3975	3990
VFHM600	900 *1650	1100 *1650	950 *1800	1100 *1800	6000	2630	7030	1630	3-6 *3-6	3605	3710	3725	3965	4070	4085
VFHM650	*1500	*1500	*1550	*1550	6500	2845	7530	1845	*3-3	—	3765	3780	—	4125	4140
VFHM700	*1250	*1250	*1250	*1250	7000	3065	8030	2065	*3-3	—	3820	3835	—	4180	4195

NOTE :(1) For height without backrest: -455mm
(2) For free lift without backrest: +455mm
(3) Weight for without backrest: -20kg
Weight for diesel model: +110kg(C240)

NOTE :

Rated capacity with (*): Shows capacity with DD: front dual tires.
Service weight of VM/VFM550-600 and of VFHM650-700 represents the weight of vehicles equipped with "SDD:special dual tires".
Lifting speed with VFM/VFHM mast: with VFM FG 480mm/s with load. 520mm/s without load.
FD 440mm/s with load. 500mm/s without load.
with VFHM FG 500mm/s with load. 540mm/s without load.
FD 460mm/s with load. 520mm/s without load.

Lowering speed with VFM/VFHM mast: 400mm/s with load. 350mm/s without load.
Overall vehicle length with VFHM mast: +15mm longer than of standard model with VM/VFM mast.

Wide View Mast

Wide View Full Free 2-Stage Mast VFW (4CYLINDER)

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest			FG20T3 FG20C3			FG25T3 FG25C3		
	FG20C3 / FD20C3Z		FG25C3 / FD25C3Z												
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)						mm	mm	mm	deg	S	DD
VFW300	1900	1900	2400	2400	3000	2045	4030	1045	6-12	3280	3385	3505	3640	3745	3865
VFW330	1900	1900	2400	2400	3300	2195	4330	1195	6-12	3310	3415	3535	3670	3775	3895
VFW350	1900	1900	2400	2400	3500	2295	4530	1295	6-12	3325	3430	3550	3685	3790	3910
VFW375	1800 *1900	1800 *1900	2350	2350	3750	2420	4780	1420	*6-6 6-12	3350	3455	3575	3710	3815	3935
VFW400	1800 *1900	1800 *1900	2300 *2350	2300 *2350	4000	2595	5030	1595	*6-6 6-12	3410	3515	3635	3770	3875	3995

NOTE :(1) For height without backrest: -455mm
(2) For free lift without backrest: +455mm
(3) Weight for without backrest: -20kg
Weight for diesel model: +110kg(C240)

Wide View Full Free 3-Stage Mast VFHW (4CYLINDER)

Mast Model	Rated Capacity/ 500mm load center (kg)				Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)					
	FG20T3 / FD20T3Z		FG25T3 / FD25T3Z			Lowered	(1)Raised with Backrest			FG20T3 FG20C3			FG25T3 FG25C3		
	FG20C3 / FD20C3Z		FG25C3 / FD25C3Z												
	PNEUMATIC	UNIQUE(SE)	PNEUMATIC	UNIQUE(SE)						mm	mm	mm	deg	S	DD
VHW435	1800	1850	2200	2300	4350	2045	5380	1045	*6-6 6-10	3425	3530	3650	3785	3890	4010
	*1900	*1900	*2400	*2400											
VHW480	1700	1800	1900	2200	4800	2195	5830	1195	*6-6 6-10	3470	3575	3695	3830	3935	4055
	*1900	*1900	*2300	*2300											
VHW500	1500	1750	1600	2000	5000	2295	6030	1295	*6-6 6-10	3495	3600	3720	3855	3960	4080
	*1800	*1800	*2250	*2250											
VHW540	1200	1650	1300	1700	5400	2420	6430	1420	3-6	3520	3625	3745	3880	3985	4105
	*1750	*1750	*2150	*2150											
VHW550	1150	1600	1250	1600	5500	2460	6530	1460	3-6	3530	3635	3755	3890	3995	4115
	*1750	*1750	*2100	*2100											

NOTE :(1) For height without backrest: -455mm
(2) For free lift without backrest: +455mm
(3) Weight for without backrest: -20kg
Weight for diesel model: +110kg(C240)

NOTE :

Rated capacity with (*): Shows capacity with DD: front dual tires.
Lifting speed with VFM/VFHM mast: with VFM FG 450mm/s with load. 490mm/s without load.
FD 440mm/s with load. 480mm/s without load.
with VFHM FG 460mm/s with load. 510mm/s without load.
FD 450mm/s with load. 500mm/s without load.

Lowering speed with VFM/VFHM mast: 420mm/s with load. 380mm/s without load.
Overall vehicle length with VFW/VFHW(4CYLINDER) mast: +35mm longer than of standard model with VM mast.

Wide View Mast

■ Wide View Mast VM

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height	Overall Mast Height		Tilting Angle F/B	(1) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered	Raised with Backrest		FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)				mm	mm	mm	deg
VM250	3000	3000	2500	1820	3760	6-10	4210	4245	4360
VM270	3000	3000	2700	1920	3960	6-10	4225	4260	4375
VM300	3000	3000	3000	2075	4260	6-12	4250	4285	4400
VM330	3000	3000	3300	2225	4560	6-12	4275	4310	4425
VM350	3000	3000	3500	2325	4760	6-12	4290	4325	4440
VM375	3000	3000	3750	2450	5010	6-6 *6-12	4310	4345	4460
VM400	3000	3000	4000	2625	5260	6-6 *6-12	4370	4405	4520
VM425	2900 *3000	3000	4250	2750	5510	6-6 *6-12	4390	4425	4540
VM450	2800 *3000	3000	4500	2875	5760	6-6 *6-12	4410	4445	4560
VM475	2750 *2900	2900	4750	3000	6010	6-6 *6-6	4430	4465	4580
VM500	2700 *2850	2850	5000	3125	6260	6-6 *6-6	4455	4490	4605
VM550	*2400	*2400	5500	3425	6760	*3-6	—	4565	4680
VM600	*2000	*2000	6000	3675	7260	*3-6	—	4605	4720

NOTE :(1) Weight for diesel model:+120kg(C240)

■ Wide View Full Free 2-Stage Mast VFM

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered	(1)Raised with Backrest			FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)				mm	mm	mm	deg	S
VFM250	3000	3000	2500	1820	3760	600	6-10	4250	4245	4360
VFM270	3000	3000	2700	1920	3960	700	6-10	4265	4260	4375
VFM300	3000	3000	3000	2075	4260	850	6-12	4295	4285	4400
VFM330	3000	3000	3300	2225	4560	1000	6-12	4320	4310	4425
VFM350	3000	3000	3500	2325	4760	1100	6-12	4335	4325	4440
VFM375	3000	3000	3750	2450	5010	1225	6-6 *6-12	4360	4345	4460
VFM400	3000	3000	4000	2625	5260	1400	6-6 *6-12	4425	4405	4520
VFM425	2900 *3000	3000	4250	2750	5510	1525	6-6 *6-12	4445	4425	4540
VFM450	2800 *3000	3000	4500	2875	5760	1650	6-6 *6-12	4465	4445	4560
VFM475	2750 *2900	2900	4750	3000	6010	1775	6-6 *6-6	4490	4465	4580
VFM500	2700 *2850	2850	5000	3125	6260	1900	6-6 *6-6	4510	4490	4605
VFM550	*2400	*2400	5500	3425	6760	2200	*3-6	—	4565	4680
VFM600	*2000	*2000	6000	3675	7260	2450	*3-6	—	4605	4720

NOTE :(1) For height without backrest: -520mm
(2) For free lift without backrest: +520mm
(3) Weight for without backrest: -30kg
Weight for diesel model:+120kg(C240)

■ Wide View Full Free 3-Stage Mast VFHM

Max Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered	(1)Raised with Backrest			FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)				mm	mm	mm	deg	S
VFHM360	3000	3000	3600	1825	4860	600	6-6 *6-10	4395	4430	4545
VFHM400	3000	3000	4000	1950	5260	725	6-6 *6-10	4425	4460	4575
VFHM435	2900 *3000	2900 *3000	4350	2075	5610	850	6-6 *6-10	4460	4495	4610
VFHM480	2800 *2900	2800 *2900	4800	2225	6060	1000	6-6 *6-10	4495	4530	4645
VFHM500	2600 *2750	2750	5000	2325	6260	1100	6-6 *6-10	4520	4555	4670
VFHM540	1900 *2650	2500 *2650	5400	2450	6660	1225	3-6 *3-6	4555	4590	4705
VFHM600	1400 *2100	1850 *2100	6000	2675	7260	1450	3-6 *3-6	4650	4685	4800
VFHM650	*1700	*1700	6500	2890	7760	1665	*3-3	—	4750	4865
VFHM700	*1350	*1350	7000	3110	8260	1885	*3-3	—	4805	4920

NOTE :(1) For height without backrest: -580mm
(2) For free lift without backrest: +580mm
(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(C240)

NOTE :

Rated capacity with (*) : Shows capacity with DD: front dual tires.

Service weight of VM/VFM550-600 and of VFHM650-700 represents the weight of vehicles equipped with "SDD:special dual tires".

Lifting speed with VFM/VFHM mast: with VFM

FG	420mm/s with load.	440mm/s without load.
FD	400mm/s with load.	410mm/s without load.
with VFHM	FG	430mm/s with load.
	FD	420mm/s with load.
		450mm/s without load.
		430mm/s without load.

Lowering speed with VFM/VFHM mast: 400mm/s with load. 350mm/s without load.

Overall vehicle length with VFHM mast: +15mm longer than of standard model with VM/VFM mast.

Wide View Mast

■ Wide View Full Free 2-Stage Mast VFW (4CYLINDER)

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered	(1)Raised with Backrest			FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)				mm	mm	mm	mm	S
VFW300	2900	2900	3000	2125	4260	900	6-12	4310	4345	4495
VFW330	2900	2900	3300	2275	4560	1050	6-12	4335	4370	4520
VFW350	2900	2900	3500	2375	4760	1150	6-12	4355	4390	4540
VFW375	2900	2900	3750	2500	5010	1275	6-6 *6-12	4375	4410	4560
VFW400	2900	2900	4000	2675	5260	1450	6-6 *6-12	4440	4475	4625

NOTE :(1) For height without backrest: -580mm
(2) For free lift without backrest: +580mm
(3) Weight for without backrest: -30kg
Weight for diesel model:+120kg(C240)

■ Wide View Full Free 3-Stage Mast VFHW (4CYLINDER)

Mast Model	Rated Capacity/ 500mm load center (kg)		Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)		
	FG30T3 / FD30T3Z FG30C3 / FD30C3Z			Lowered	(1)Raised with Backrest			FG30T3 FG30C3		
	PNEUMATIC	UNIQUE(SE)						mm	mm	mm
VHW435	2800 *2900	2900	4350	2125	5610	900	6-6 *6-10	4470	4505	4655
VHW480	2700 *2800	2800	4800	2275	6060	1050	6-6 *6-10	4510	4545	4695
VHW500	2600 *2750	2750	5000	2375	6260	1150	6-6 *6-10	4535	4570	4720
VHW540	1900 *2650	2500 *2650	5400	2500	6660	1275	3-6	4565	4600	4750
VHW550	1900 *2600	2350 *2600	5500	2540	6760	1315	3-6	4575	4610	4760

NOTE :(1) For height without backrest: -580mm
(2) For free lift without backrest: +580mm
(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(C240)

NOTE :

Rated capacity with (*): Shows capacity with DD: front dual tires.		
Lifting speed with VFM/VFHM mast: with VFM	FG	360mm/s with load. 420mm/s without load.
	FD	370mm/s with load. 390mm/s without load.
	with VFHM	FG 380mm/s with load. 430mm/s without load.
	FD	310mm/s with load. 410mm/s without load.

Lowering speed with VFM/VFHM mast: 400mm/s with load. 350mm/s without load.
Overall vehicle length with VFV/VFHW(4CYLINDER) mast: +35mm/+45mm longer than of standard model with VM mast.

Wide View Mast

Wide View Mast VM

Mast Model	Rated Capacity / 500mm load center(kg)		Max. Fork Height	Overall Mast Height		Tilting Angle F/B	(1) Service weight(kg)	
	FG/D35T3S			Lowerd	Raised with Backrest		FG35T3S	
	PNEUMATIC	UNIQUE(SE)					mm	mm
VM250	3500	3500	2500	1885	3760	6-10	4770	4785
VM270	3500	3500	2700	1985	3960	6-10	4790	4805
VM300	3500	3500	3000	2135	4260	6-12	4820	4835
VM330	3500	3500	3300	2285	4560	6-12	4850	4865
VM350	3500	3500	3500	2385	4760	6-12	4870	4885
VM375	3500	3500	3750	2510	5010	6-6 *6-12	4890	4905
VM400	3500	3500	4000	2685	5260	6-6 *6-12	4960	4975
VM425	3500	3500	4250	2810	5510	6-6 *6-12	4985	5000
VM450	3400	3450	4500	2935	5760	6-6 *6-12	5005	5020
VM475	3400	3400	4750	3060	6010	6-6	5030	5045
VM500	3300	3350	5000	3185	6260	6-6	5055	5070
VM550	*3200	*3200	5500	3485	6760	*3-6	—	5160
VM600	*2400	*2400	6000	3735	7260	*3-6	—	5205

NOTE :(1) Weight for diesel model: +120kg(QD32)

Wide View Full Free 2-Stage Mast VFM

Mast Model	Rated Capacity / 500mm load center(kg)		Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)	
	FG/D35T3S			Lowerd	(1)Raised with Backrest			FG35T3S	
	PNEUMATIC	UNIQUE(SE)						mm	mm
VFM250	3500	3500	2500	1885	3760	655	6-10	4860	4875
VFM270	3500	3500	2700	1985	3960	755	6-10	4880	4895
VFM300	3500	3500	3000	2135	4260	905	6-12	4910	4925
VFM330	3500	3500	3300	2285	4560	1055	6-12	4945	4960
VFM350	3500	3500	3500	2385	4760	1155	6-12	4965	4980
VFM375	3500	3500	3750	2510	5010	1280	6-6 *6-12	4995	5010
VFM400	3500	3500	4000	2685	5260	1455	6-6 *6-12	5065	5080
VFM425	3500	3500	4250	2810	5510	1580	6-6 *6-12	5095	5110
VFM450	3400	3400	4500	2935	5760	1705	6-6 *6-12	5120	5135
VFM475	3300	3300	4750	3060	6010	1830	6-6	5145	5160
VFM500	3200	3250	5000	3185	6260	1955	6-6	5175	5190
VFM550	*3000	*3000	5500	3485	6760	2255	*3-6	—	5285
VFM600	*2400	*2400	6000	3735	7260	2505	*3-6	—	5340

NOTE :(1) For height without backrest: -445mm
(2) For free lift without backrest: +445mm
(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(QD32)

Wide View Full Free 3-Stage Mast VFHM

Mast Model	Rated Capacity / 500mm load center(kg)		Max. Fork Height	Overall Mast Height		(2)Free lift with Backrest	Tilting Angle F/B	(3) Service weight(kg)	
	FG/D35T3S			Lowerd	(1)Raised with Backrest			FG35T3S	
	PNEUMATIC	UNIQUE(SE)						S	DD
VFHM360	3500	3500	3600	1885	4860	655	6-6 *6-10	4975	4990
VFHM400	3500	3500	4000	2010	5260	780	6-6 *6-10	5010	5025
VFHM435	3500	3500	4350	2135	5610	905	6-6 *6-10	5040	5055
VFHM480	3400	3400	4800	2285	6060	1055	6-6 *6-10	5080	5095
VFHM500	3300	3300	5000	2385	6260	1155	6-6 *6-10	5110	5125
VFHM540	2600 *3200	2700 *3200	5400	2510	6660	1280	3-6 *3-6	5140	5155
VFHM600	1600 *2400	2000 *2400	6000	2735	7260	1505	3-6 *3-6	5250	5265
VFHM650	*2000	*2000	6500	2950	7760	1720	*3-3	—	5330
VFHM700	*1600	*1600	7000	3170	8260	1940	*3-3	—	5390

NOTE :(1) For height without backrest: -530mm
(2) For free lift without backrest: +530mm
(3) Weight for without backrest: -30kg
Weight for diesel model: +120kg(QD32)

NOTE :

Rated capacity with (*): Shows capacity with front dual tires.
Lifting speed with VFM/VFHM mast: with VFM 390mm/s with load. 410mm/s without load.
with VFHM 450mm/s with load. 470mm/s without load.
Lowering speed with VFM/VFHM mast: 440mm/s with load. 380mm/s without load.
Overall vehicle length with VFHM mast: +15mm longer than of standard model with VM/VFM mast.

STANDARD EQUIPMENT AND ACCESSORIES

[Equipment]

- Adjustable ORS seat with belt
- Asbestos-free brake shoe materials
- Cylinder type bonnet latch with locking function
- Donaldson dry type cyclopac air-cleaner
- Drawbar device
- Durable overhead guard with resin screen
- Engine auto glow system (Diesel)
- Engine idle-up device(Gasoline)
- Flow control valve
- Fuel water sedimenter (Diesel)
- Full hydrostatic power steering
- Full transistorized ignition (Gasoline)
- Hydraulic oil dipstick
- Interlock system¹⁾
- ITA class III carriage
- J-lug pneumatic industrial tires
- Lift circuit cut-off valve
- Load backrest
- Radiator coolant reservoir
- Return hydraulic filter
- Suction hydraulic strainer
- Tilt lock valve
- Transmission oil dipstick (power shift T/M)
- Transmission oil filter (power shift T/M)
- Wide view two stage mast(VM300)
- 1070mm forks
- 2-spool control valve with pressure relief

[Controls]

- Electric shift control lever (direction change)
- Lift and tilt levers
- Multi-function switch lever with self-cancelling mechanism (Lighting & turn-signal)
- Parking brake lever with inter-lock
- Tilt adjustable steering post
- Neutral safety mechanism

[Accessories]

- Access-assisted hand grip
- Back-up buzzer
- Back-up lights
- Deluxe floor mat
- Detachle and portable glove box
- Electric horn
- Front combination lights (turn signal, clearance)
- Head lights - trafic purpose
- High-mounted rear combination lights
- Operator tool kit
- Pen/ Cup holder
- Side view mirrors

[Instruments and Switch]

- Charge indicator
- Engine oil pressure warning indicator
- Fuel gauge
- Glow indicator (Diesel)
- Hourmeter
- Ignition key engine stop (Diesel)
- Neutral safety switch
- Fuel water sedimenter indicator (Diesel)
- Water temperature gauge

NOTE :

- Meets following major standards and code:
ISO22915-2 Counter Balanced Lift Trucks, Stability & Safety Test(Int'l)
ISO 3691 Powered industrial trucks - safety code
JIS D6001 Industrial Lift Trucks (Japan)
ISO D6011 Stability & Safety Test (Japan)
- Overhead guard meets ISO 6055, JIS D6021
- Specifications are subject to change without notice and its may vary depending on markets.
Please consult your TCM representative for details.

OPTIONAL LOADING ATTACHMENT

- Alternative fork lengths
- Alternative lengths fork extension sleeve
- Bale clamp (LG)
- Carton clamp(2-3t) (CLG)
- Crane arm (CA)
- Drum clamp(2-3t) (DLG)
- Fork clamp(2-3t) (FLG)
- Fork positioner hydraulic type(Hook-on/ Integral)(FS)
- Fork positioner manual type
- High, wide type load backrest
- Hinged forks/ scoop (HFS)
- Load push-pull(2-3t) (PPC)
- Load stabilizer(2-3t) (STA)
- Ram attachment (RA)
- Rotating forks (Hook-on/ Integral type) (RF)
- Rotating paper roll clamp (Hook-on/ Integral type)(PR)
- Side-shifter(Hook-on/ Integral) (SS)
- Sleeve-in hook
- Wide type fork carriage
- Wide view full free 2-stage (VFM) mast
- Wide view full free 3-stage (VFHM) mast
- Wide view full free 2-stage 4cyl (VFW) mast(2-3t)
- Wide view full free 3-stage 4cyl (VFHW) mast(2-3t)

OPTIONAL EQUIPMENT AND ACCESSORIES

[Equipment]

- Auxiliary hydraulic valve modules(max. 5spool)
- Cabin - panel type(SCBPA)
- Central greasing system (CL)
- Color tire (white, green)
- Dual element aircleaner(ADE)
- Exhaust purify catalytic muffler(EPM)(Diesel)
- Fingertip hydraulic valve control (FIT)
- Fishery industry package (FC)(2-3t)
- Front dual drive wheels(DD/ SDD)
- Full open cabine(AW 061)
- Heater(HR)
- Heater & defroster (DEF)
- High capacity radiator - High power model(RAD PF2)
- Interlock system¹⁾ (SIL)
- Lift lock mechanism (VLL)
- Load sensing valve (VLS)
- LPG exclusive/ Dual fuel(LPG - Gasoline) package
- Non-slip differential(power shift T/M)
- Oil clutch(manual T/M)
- Overhead exhaust system(TUE)
- Overhead guard/ High profile
- Overhead guard/ Low profile
- Plate fin type radiator(RAD PF)
- Power clutch(manual T/M)
- Pre-cleaner engine air intake(CAK B)(Gasoline)
- Radiator dust screen (fine, medium mesh)
- Smoke reduction/spark arrester muffler (Diesel)
- Steel cabin - enclosed type(SCB 001)
- Synchronised steering mechanism(SRS)
- Unique cushion tires(SE)
- Windshield wiper




[Accessories]

- Custom paint-work
 - Fire extinguisher(FE)
 - Rear working light(RWL)
 - Rotating warning light(RLY/RLR)
 - Tilt cylinder boots(TLB)
- [Instruments and Switch]
- Ammeter (AM)
 - O.K. monitor (fuel level, battery electrolyte level, coolant level, parking brake, air-cleaner, seat-belt)
 - Speedometer (SM)
 - Torque converter oil pressure gauge (TPM)
 - Torque converter oil temperature gauge (power shift T/M)

Others on request

NOTE : 1) STD for EXE specification

GROUND CLEARANCE	FD / FG20-25	FD / FG30	FD/FG35T3S
	FHG20-25	FHG30	
	mm	mm	mm
Mast	110	140	145
Frame	120	145	190
Front axle	125	145	165
Rear axle	150	175	185
Counter weight	155	185	225

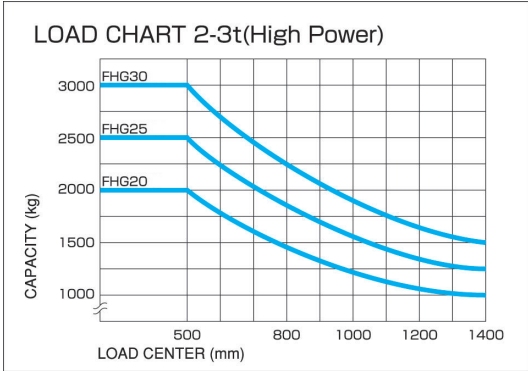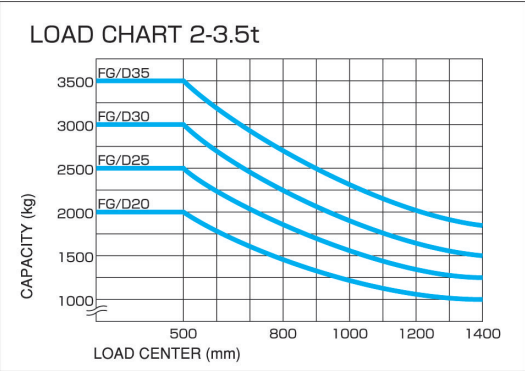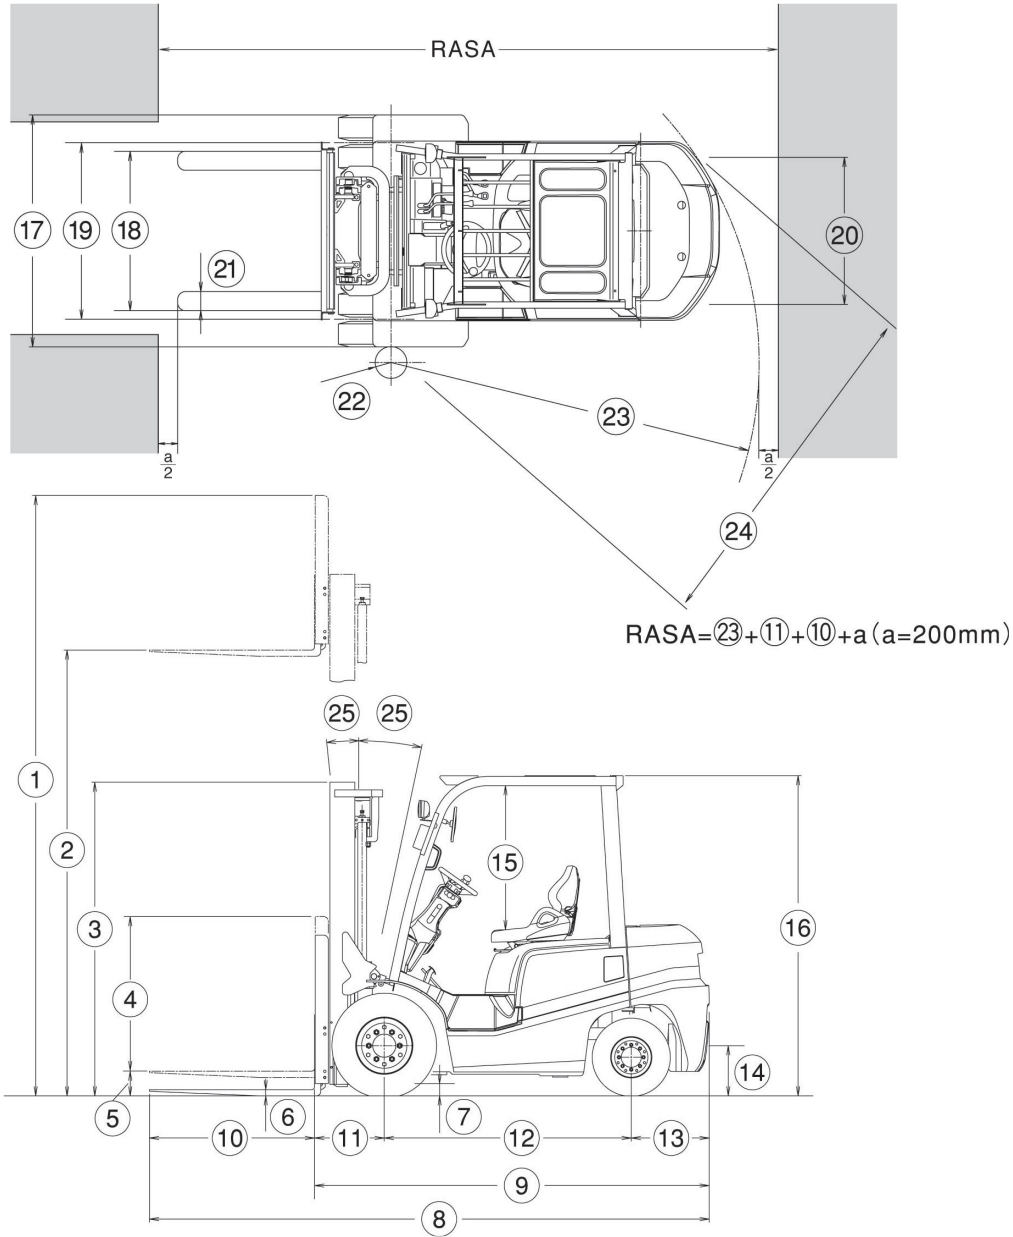

STANDARD DIMENSIONS

STANDARD DIMENSIONS

Model	FD / FG20	FD / FG25	FD / FG30	FD/FG35T3S
	FHG20	FHG25	FHG30	
	mm	mm	mm	mm
① Overall height, fork raised(with backrest)	4030	4030	4260	4255
② Maximum fork height	3000	3000	3000	3000
③ Mast height, fork lowered	2030	2030	2075	2135
④ Backrest height	1000	1000	1220	1220
⑤ Free lift	110	110	165	170
⑥ Fork thickness	40	40	45	50
⑦ Ground clearance(front axle)	125	125	145	145/165
⑧ Overall length(with forks)	3555	3625	3775	3870
⑨ Length to fork face	2485	2555	2705	2800
⑩ Fork length	1070	1070	1070	1070
⑪ Load distance(centerline of front axle to front face of forks)	450	450	480	495
⑫ Wheelbase	1600	1600	1700	1700
⑬ Rear overhang	435	505	525	605
⑭ Drawbar Pin Center Height	530	530	560	610
⑮ Overhead guard clearance(from face of seat)*	1005	1005	1005	1005
⑯ Overall height(overhead guard)*	2070	2070	2090	2140
⑰ Overall width	1150	1150	1225	1290
⑱ Fork spread(outside)	245 - 1020	245 - 1020	250 - 1090	300 - 1090
⑲ Tread (front)	970	970	1000	1060
⑳ Tread (rear)	970	970	970	970
㉑ Fork width	122	122	125	150
㉒ Inside turning radius	160	160	200	200
㉓ Outside turning radius	2170	2240	2400	2470
㉔ Minimum intersecting aisle	2210	2230	2330	2390/2380
㉕ Tilt angles(forward-backward)	6° - 12°	6° - 12°	6° - 12°	6° - 12

NOTE : *Oceania(EXC) and European export trucks(EXE): +60mm

DIMENSIONS WITH FRONT DUAL DRIVE WHEELS (option)

Model	FD / FG20	FD / FG25	FD / FG30	FD/FG35T3S
	FHG20	FHG25	FHG30	
Tire size (front dual Type: DD)		4 x 5.50-15-8PR(I)	4 x 6.00-15-10PR(I)	
	mm	mm	mm	mm
⑰ Overall width	1480	1480	1520	1600
⑲ Tread (front)	1130	1130	1170	1230
㉒ Inside turning radius	100	100	100	100
㉓ Outside turning radius	2240	2310	2430	2540
㉔ Minimum intersecting aisle	2320	2340	2445	2500

Tire size (front dual Type: SDD)		4 x 7.00 -12-12PR(I)	4 x 28 x 9-15-12PR(I)	—
	mm	mm	mm	mm
⑰ Overall width	1590	1590	1750	—
⑲ Tread (front)	1190	1190	1260	—
㉒ Inside turning radius	100	100	100	—
㉓ Outside turning radius	2280	2350	2500	—
㉔ Minimum intersecting aisle	2370	2380	2490	—



<http://www.tcm-forklift.jp>

© 2018 by ML. All rights reserved. Printed in Japan.

Note:

These products and specifications are subject to change without notice.
Photos and illustrations may slightly differ from the actual trucks.
Photos and illustrations may or may not include optional equipment and accessories.
Features and specifications may vary depending on markets.
Performance data and dimensions are nominal and subject to tolerances.
Produced in ISO certified factory.

PRESENTED BY :